


Viewed from the outside. Combos available.

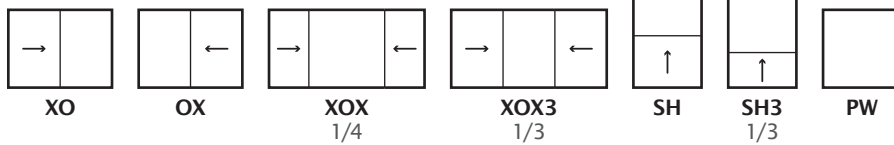

The Clear Choice Is Crystal

Vista PLUS Vinyl Windows

Series 5000 | Replacement & New Construction Applications

SLIDERS, SINGLE HUNG & FIXED WITH EVEN SIGHTLINES

QUALITY VINYL EXTRUSIONS

15-point quality vinyl extrusions assurance program.

MULTICHAMBERED FRAME DESIGN

Provides strength, energy efficiency and efficient water drainage.

3 1/4" NAIL-ON, BLOCK & RETROFIT FRAMES

Nail-on with integral nail fin and stucco key. Block with no fin and sloped sill adapter. Retrofit with integral dual-wall flush fin (extension available*).

1" ENERGY-EFFICIENT INSULATED GLASS UNIT

Includes annealed glass and high-performance Intercept® spacer system. Tempered glass available.

INTERLOCKING SASHES & WEATHERSTRIPPING

Combined to guard against air and water infiltration.

EFFORTLESS LOCKING WITH AUTO LOCK

Latch will retract and engage automatically when closing window.

DURABILITY & EASY OPERATION

Sliders include adjustable dual-brass rollers with stainless steel axles. Single hung feature a stable block and tackle balance system.

TWO CONCEALED VENT LATCHES

Vent latch limits vent panel movement when engaged.

CRYSTALVIEW IMPROVED-VISIBILITY SCREEN

Integral pull handle makes screen removal easy.

WARNING: Screens and vent latches are not fall prevention devices. Please take proper precautions.

CHOOSE WHITE OR CLAY

White standard. CrystalCoat exterior colors available.

INCREASE ENERGY EFFICIENCY

Insulated glass units available with LowE3/Argon or LowE2 performance glass.

IMPROVE ACOUSTICAL PROPERTIES

1/8-3/16" dissimilar glass available with STC 32 rating.

ENHANCE BEAUTY & STYLE

Colonial, Marginal, Queen Anne and Valance grid patterns available with flat or sculptured grid.

ADD PRIVACY & BEAUTY

Specialty glass available (e.g., obscure, glue chip, rain).

PERFORMANCE SUMMARY

Class-PG: HS-SH-PW LC-30

U-FACTOR: LE3/Ar (DS-DS) HS-SH 0.31, PW 0.29


SHGC: LE3/Ar (DS-DS) HS-SH-PW 0.22

U-FACTOR: LE3/Ar (DS-3/16) HS-SH 0.30


SHGC: LE3/Ar (DS-3/16) HS-SH-PW 0.22

STC: Annealed (DS-3/16) HS-SH 32, PW 33

FRAME CROSS SECTION

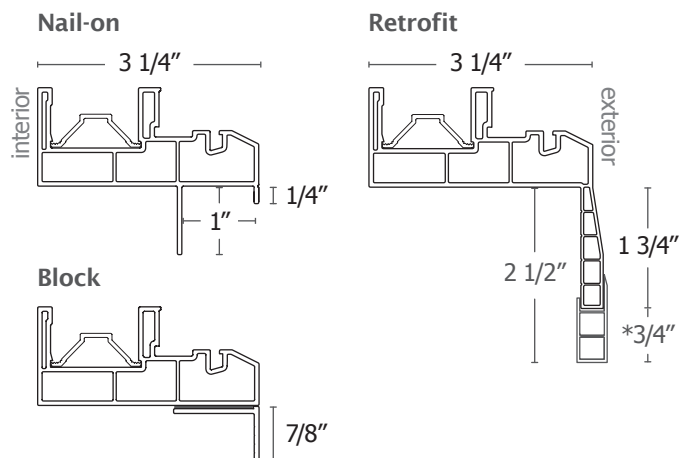

AUTO LOCK PROFILE (top, side & back view)



LowE3 / Argon
for Title 24



AVAILABLE @
CRYSTALPACIFICWINDOW
.COM/DOWNLOAD

REFVP010617
© 2017 CRYSTAL WINDOW
& DOOR SYSTEMS